




Mega paving slabs Rockstone

The Rockstone Mega paving slabs have, like the Rockstone concrete pavers, a typically granular appearance. After production, they undergo a special “wash-out” process, which ensures the rich variegation of the natural stone granulate comes to the forefront. In addition, this production process ensures the Rockstone Mega paving slabs retain their colour. Stone & Style offers the Rockstone in the same eight formats as the Carreau Mega paving slab. This means you can allow your creative energy

to run free. The Rockstone Mega paving slab is available in five colours: Silver, Blue Steel, Diamond, Dark and Big White. They are produced in various thicknesses: 6 cm thick for terraces, and 8 cm thick for driveways that are subjected to a greater load. For the perfect finish to a garden, terrace or driveway, you can also consider the Rockstone Megasteps, Rockstone Megapalisade edging, Rockborder, Rockstone Mega Linea XXL multiformats, Rockstone MegaLinea & Mega Matrix.

► Colours

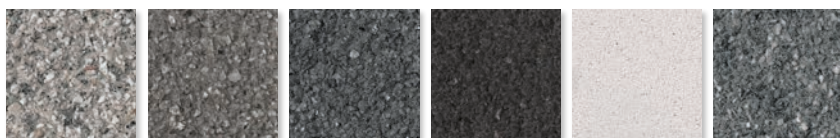

| Silver | Blue Steel | Diamond | Dark | Big White | Dimgrey

► Dimensions

(LxWxH)	SILVER	BLUE STEEL	DIAMOND	DARK	BIG WHITE	DIMGREY
100x100x6 cm	✓	✓	✓	✓	✓	
100x50x6 cm	✓	✓	✓	✓		
100x25x6 cm	✓	✓	✓			
120x80x6 cm		✓	✓			
60x60x6 cm	✓	✓	✓	✓	✓	
60x30x6 cm	✓	✓	✓	✓		
50x50x6 cm	✓	✓	✓	✓		
100x100x8 cm	✓	✓	✓	✓		
100x50x8 cm	✓	✓	✓			
80x80x8 cm		✓	✓	✓		
50x50x8 cm	✓	✓	✓			
Mega-Linea XXL multiformat parquet (LxBxH)						
Combination of 1 lengths and 3 widths 60x (20-25-30) x8 cm		✓	✓	✓		✓
Mega-Linea multiformat parquet (LxBxH)						
Combination of 3 lengths and 3 widths (20-30-40) x (8-10-12) x8 cm		✓				
Mega-MATRIX multiformat (LxBxH)						
Combination of 3 dimensions (40x40 40x20 20x20) x6 cm		✓	✓	✓		



Mega paving slabs Rockstone

► Maintenance

- Always clean the tiles immediately after a spill. Acidic products, animal droppings and vegetable residue can cause permanent stains.
- Remove normal contamination with a hard brush or a combination of a hard brush and clean water.
- For stubborn stains, we recommend a neutral detergent. For oil and grease stains, products are available at construction markets (Lösefix from Lithofin, HG Super remover ...).
- A green layer can usually be easily removed by treating the tiles (pouring or spraying) with anti-moss products. These are available at construction markets (Allex Lithofin).
- Avoid the use of a high-pressure cleaner, as this will damage the surface of the tiles and make them rougher. This will make the tiles more porous, which will result in them getting green and dirty faster.

► Placement

- Take precautions to prevent contamination during placement, cover with plastic if necessary – note: leaving the tiles covered for too long could cause efflorescence.
- Clean the surface with clean water every day at the end of the working day.
- Never do any sawing work on or next to the placed paving.
- Eliminate small imperfections and differences in thickness by tapping with a plastic hammer.
- For placement with a minimal joint, grouting is not necessary and even discouraged.
- For placement with a larger joint, rub it in with coarser grouting material such as clean crushed aggregates 1/3 or 2/5 mm. Never repoint with cement mortar to prevent freezing of joints