

# ALFRESCO

## F L O O R S

# Rucker 20mm

## Precision External Non-Slip Porcelain Tiles

4

COLOURS


1

FINISHES


1

SIZES

- **Rucker** – natural warmth and a tactile appeal of an oak wood effect range
- Slip resistant, natural surfaces that speak of age and homely memories
- Ideal for residential and commercial settings including wet areas
- Refer to **Rucker** for seamless transition between inside and outside, in 11 mm thickness

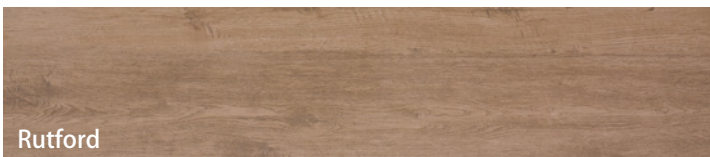

Rutford

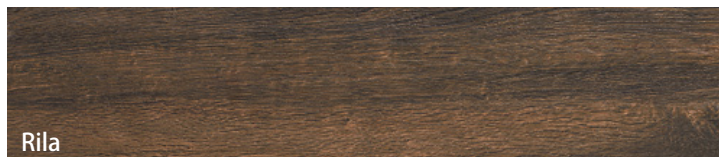

Rila



Riff






Rowe

V3 - HIGH SHADE VARIATION

PRINT COLOURS MAY VARY FROM ORIGINAL. TILE SAMPLES SHOULD BE REQUESTED

Breaking Strength	EN ISO 10545-4	S > 11000 N
Bending Strength	EN ISO 10545-4	R > 45 N/mm <sup>2</sup>
Point Load	EN 12825	> 6 kN Centre > 7 kN Centre of Side > 4 kN Diagonal
Resistance to Abrasion	EN ISO 10545-6	< 120 mm <sup>3</sup>

**Important Note:** for installations using pedestals that incorporate a void of 75mm or greater, please contact us for advice regarding the recommended provision of a reinforcing mesh for safety.



- A. Open Joint. Recommended spacer tab 3mm. Allows water to drain off the surface.
- B. Fully adjustable pedestal height: 40 – 1030mm. Option of built-in slope corrector to counteract undulating substrates and to accommodate drainage falls.

SIZE	FINISH	THICKNESS	COLOUR AVAILABILITY
1	1195x 395mm (R) NATURAL ANTI-SLIP	20mm ALL	



(R) RECTIFIED SIZE / SQUARED EDGE WITH MICRO BEVEL

